

TSR01

SAW RESONATORS

TSR01 Series SAW Resonator SMD


Features:

- ◆ Stable Oscillators
- ◆ SMD ceramic package
- ◆ Application: Remote Control
- ◆ Hermetically Sealed

| Model | Frequency | | Insertion Loss MAX (MHz) | Terminating Impedance | |
|----------|--------------|--------------|--------------------------------|-----------------------|-----|
| | MIN (MHz) | TYP (MHz) | | MAX (dB) | TYP |
| TSR288E | 287.925 | 288.000 | 288.075 | 2.5 | 50 |
| TSR293E | 293.050 | 293.125 | 293.200 | 2.5 | 50 |
| TSR2972E | 297.125 | 297.200 | 297.275 | 2.5 | 50 |
| TSR3038E | 303.800 | 303.875 | 303.950 | 2.5 | 50 |
| TSR3046E | 304.525 | 304.600 | 304.675 | 2.5 | 50 |
| TSR311E | 311.550 | 311.625 | 311.700 | 2.5 | 50 |
| TSR312E | 311.925 | 312.000 | 312.075 | 2.5 | 50 |
| TSR315E | 314.925 | 315.000 | 315.075 | 2.5 | 50 |
| TSR318E | 318.550 | 318.625 | 318.700 | 2.5 | 50 |
| TSR3499E | 349.850 | 349.925 | 350.000 | 2.5 | 50 |
| TSR384E | 383.925 | 384.000 | 384.075 | 2.5 | 50 |
| TSR418E | 418.112 | 418.187 | 418.262 | 2.5 | 50 |
| TSR4247E | 424.625 | 424.700 | 424.755 | 2.5 | 50 |
| TSR4334E | 433.345 | 433.420 | 433.495 | 2.5 | 50 |
| TSR4339E | 433.845 | 433.920 | 433.995 | 2.5 | 50 |
| TSR450E | 449.925 | 450.000 | 450.075 | 2.5 | 50 |
| TSR8683E | 868.200 | 868.350 | 868.500 | 2.5 | 50 |

SAW RESONATORS: TSR01 Series Resonator

SAW RESONATORS: TSR01 Series Resonator

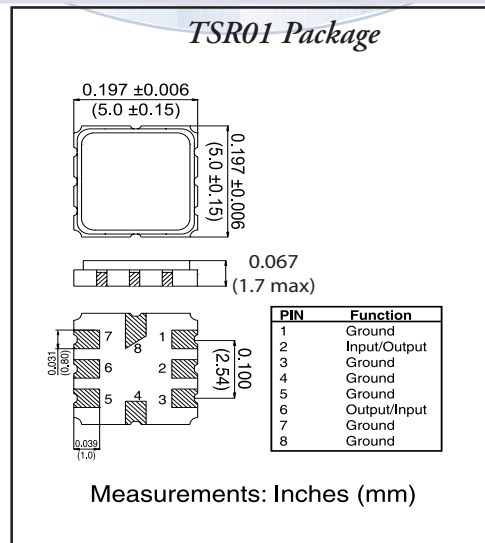

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175
• Email: info@telluriantech.com • www.telluriantech.com