



T6000

CLOCK OSCILLATORS

T6000 Series Clock Oscillator

Ultra-Miniature, Low Profile, SMD



Features:

- ◆ Miniature Ultra Low Profile
- ◆ Compatible with pick and place
- ◆ Ceramic SMD package
- ◆ Tape and Reel Available

Model: T6000 Series Specifications


Parameter	Unit	T6000
Frequency Range (1)	MHz	1.00 to 50.00
Operating Temperature Range	°C	See Table
Frequency Stability (2)	ppm	See Table
Supply Voltage	VDC	1.8, 2.5, 3.3
Supply Current	mA	10 max.
WaveForm		CMOS
Load	pF	15
Output Levels	V	10% max. // 90% min.
Transition Times (Rise/Fall)	nSec	10 max.
Duty Cycle	%	40/60%
Aging (per year)	ppm	±5.0 max.
Storage Temperature	°C	-55 to 125
Tri-State		Pin 1
Enable	V	0.7 min.
Disable	V	0.3 max.
Standby Current	mA	10
Start Up Time	ms	10
Period Jitter; (12kHz to 20MHz)	ps	1 max.
Period Jitter: pk-pk	ps	±100 max
Period Jitter: One Sigma	ps	±25 max.

(1) Inclusive of calibration @ 25°C, operating temperature, Input voltage change, load change, shock, and vibration.

CLOCK OSCILLATOR: T6000 Series Ultra Miniature Clock

CLOCK OSCILLATOR: T6000 Series Ultra Miniature Clock

Temperature	Stability (ppm)
0 to 70°C	±20, ±25, ±50
-10 to 70°C	±20, ±25, ±50
-20 to 70°C	±20, ±25, ±50
-40 to 85°C	±25, ±50

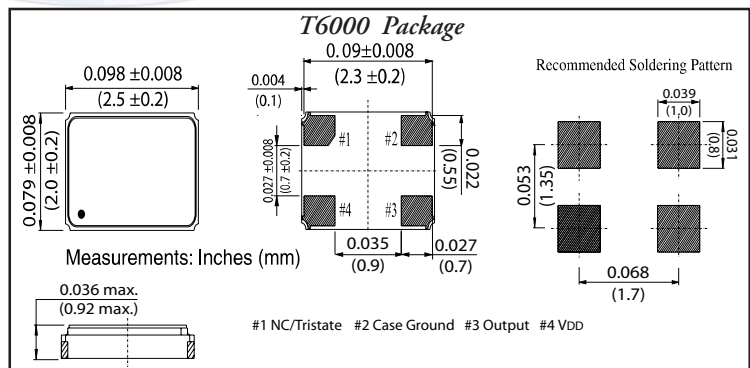

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175
• Email: info@telluriantech.com • www.telluriantech.com