

TSR11

SAW RESONATORS

TSR11 Series SAW Resonator


Features:

- ◆ Stable Oscillators
- ◆ Application: Remote Control
- ◆ Thru-Hole F-11 package
- ◆ Hermetically Sealed

Model	Frequency		Insertion Loss MAX (MHz)	Terminating Impedance	
	MIN (MHz)	TYP (MHz)		MAX (dB)	TYP (ohms)
TSR260F	259.925	260.000	260.075	2.5	50
TSR3033F	303.250	303.325	303.400	2.5	50
TSR3038F	303.800	303.875	303.950	2.5	50
TSR3043F	304.225	304.300	304.375	2.2	50
TSR3085F	307.965	308.040	308.115	2.5	50
TSR310F	309.925	310.000	310.075	2.5	50
TSR311F	311.550	311.625	311.700	2.5	50
TSR3145F	314.425	314.500	314.575	2.2	50
TSR315F	314.925	315.000	315.075	2.5	50
TSR3168F	316.725	316.800	316.875	2.2	50
TSR318F	317.925	318.000	318.075	2.2	50
TSR3195F	319.425	319.425	319.575	2.2	50
TSR325F	324.925	325.000	325.075	2.2	50
TSR3351F	335.025	335.100	335.175	2.2	50
TSR345F	344.925	345.000	345.075	2.2	50
TSR395F	394.925	395.000	395.075	2.2	50
TSR4035F	403.475	403.550	403.625	2.5	50

SAW RESONATORS: TSR11 Series Resonator

SAW RESONATORS: TSR-1 Series Resonator

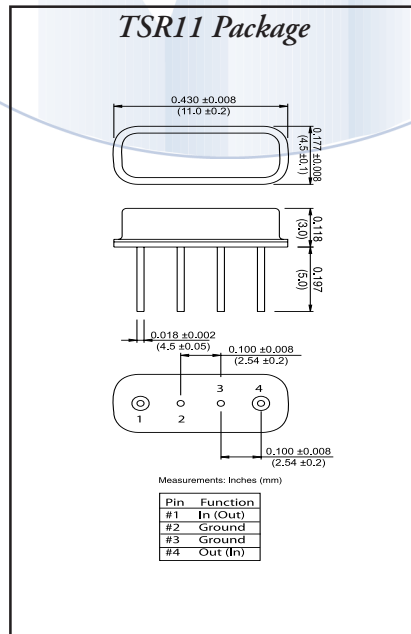

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175

• Email: info@telluriantech.com • www.telluriantech.com