



TCXOs, VCTCXOs

TT~VT1000TC Series TCXO/VCTCXO

TT1000TC

Features:

- ◆ Higher Frequencies Available
- ◆ Metal Can
- ◆ Low Stabilities
- ◆ Clip Sine and HCMOS available

RoHS Complaint Optional

Parameter		Clipped Sine	HCMOS
Frequency Range		9.600MHz ~70.000MHz	
Operating Temperature Range		See Table	
	vs. Temperature	See Table	
Frequency Stability	vs. Voltage ($\pm 5\%$)	± 0.3 ppm max.	
	vs. Aging	± 1.0 ppm/ Year	
	vs. Load ($\pm 10\%$)	± 0.3 ppm max.	
Supply Voltage		+3.3 // +5V $\pm 5\%$	+3.3 // +5V $\pm 5\%$
Current	9.6000 to 27.00MHz	2mA Max.// 3mA max.	20mA Max.// 25mA max.
Consumption	27.001 to 70.00MHz	3mA Max.// 4mA max.	35mA Max.// 40mA max.
Output Voltage Logic High (VOH)		0.8V p-p Min. (3.3V)	90% of V _{CC}
	(VOL)	1.0V p-p Min. (5.0V)	10% of V _{CC}
Load		10K ohm / 10 pF	15 pF
Rise/ Fall Time		4ns max.// 5ns. max	
Duty Cycle		50 $\pm 10\%$	
Frequency Adjustment Trimmer		± 3.0 ppm Min.	
Frequency Deviation (VCTCXO only)		± 5 ppm to ± 11.5 ppm over control voltage	
Control Voltage (VCTCXO only)		1.65V ± 1.65 V // 2.5V ± 2.0 V	

Temperature	Stability (ppm)
0 to 55°C	$\pm 0.5, \pm 1.0, \pm 2.0, \pm 2.5$ to ± 5.0
-10 to 60°C	$\pm 0.5, \pm 1.0, \pm 2.0, \pm 2.5$ to ± 5.0
-20 to 70°C	$\pm 1.0, \pm 2.0, \pm 2.5$ to ± 5.0
-30 to 85°C	$\pm 1.0, \pm 2.0, \pm 2.5$ to ± 5.0
-40 to 85°C	$\pm 1.0, \pm 2.0, \pm 2.5$ to ± 5.0

See Next Page for Drawing

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175
 • Email: info@telluriantech.com • www.telluriantech.com


TCXOs~VCTCXOs: TT/VT 1000TC Series

TCXOs~VCTCXOs: TT/VT 1000TC Series

TCXOs, VCTCXOs
TT~VT1000TC Series TCXO/VCTCXO

TCXOs~VCTCXOs: TT/VT 1000TC Series

TCXOs~VCTCXOs: TT/VT 1000TC Series

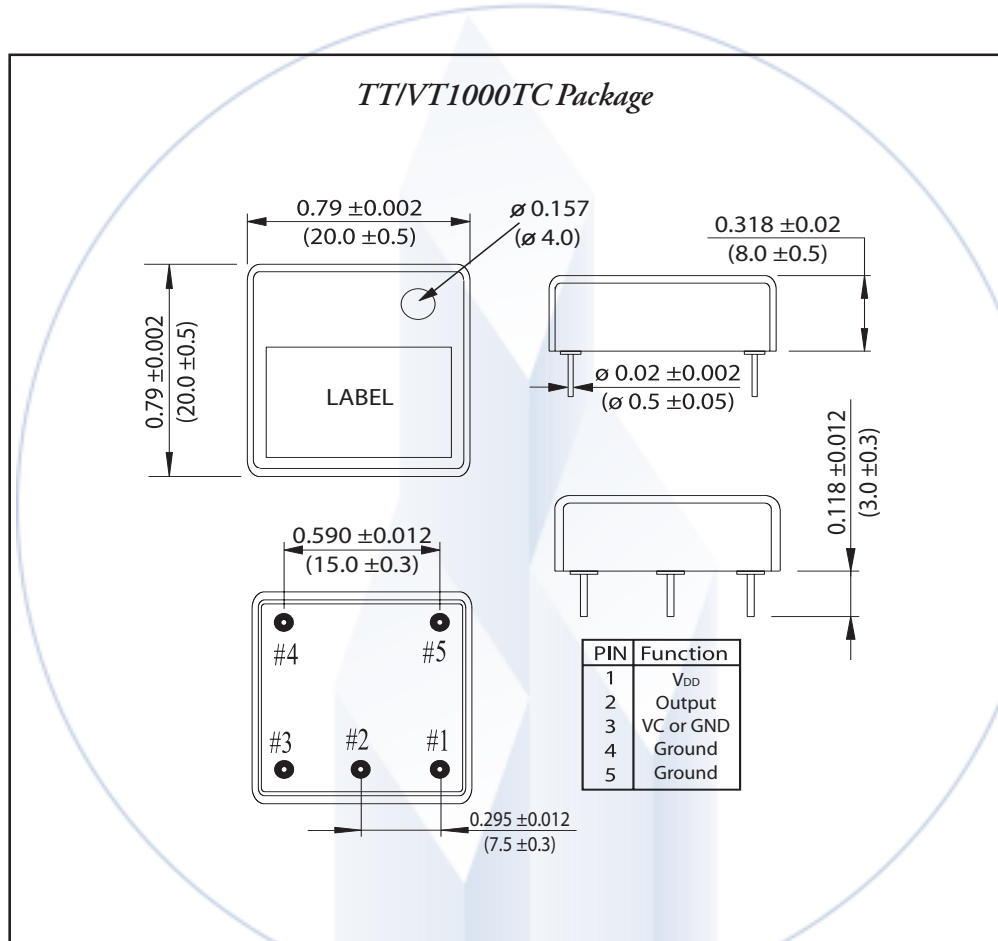

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175
 • Email: info@telluriantech.com • www.telluriantech.com