

TT5000

RoHS Compliant Standard

TCXOs, VCTCXOs TT~VT5000 Series TCXO/VCTCXO Ultra Low Profile, SMD

Features:

- ◆ Up to 40.00MHz
- ◆ Tight Stability Available
- ◆ +2.8 volt operation available
- ◆ Low current drain


Model: TT/VT5000 Series Specifications

Parameter	TCXO	VCTCXO
Frequency Range	13.00 ~ 40.00 MHz ¹	
Operating Temperature Range	0 to 55°C to -40 to 85°C	
Frequency vs. Temperature	±0.5 to ±2.5 ppm	
Stability vs. Supply Voltage	±0.2 ppm (±5% change)	
vs. Aging	±1.0 ppm/year	
Supply Voltage	+2.5V, +2.8 V, +3 V or +5 V ±5%	
Current Consumption	2.0 mA max.	
Output Load	0.8V p-p max. (Clip Sine)	
Output Logic	10 kΩ // 10 pF (±10%)	
Input Impedance	1.0 MΩ	
Start up Time	2 mSec	
Deviation (VCTCXO only)	±5 ppm min.	±15 ppm Max.
Control Voltage (VCTCXO only)	+0.5 V min.	+2.5 V max

(1) 26.00 to 40.00MHz only available at 2.8 volts to 3.3 volts.

TCXO~VCTCXO: TT~VT5000 Series

TCXO~VCTCXO: TT~VT5000 Series

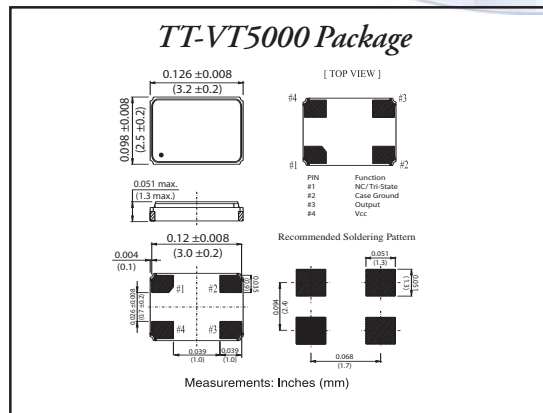

Temperature	Stability (ppm)
0 to 55°C	±0.5, ±1.0, ±1.5, ±2.0, ±2.5
-10 to 60°C	±0.5, ±1.0, ±1.5, ±2.0, ±2.5
-20 to 70°C	±0.5, ±1.0, ±1.5, ±2.0, ±2.5
-30 to 85°C	±0.5, ±1.0, ±1.5, ±2.0, ±2.5
-40 to 85°C	±1.0, ±1.5, ±2.0, ±2.5

Tellurian® Technologies, Inc.

1801 Hicks Road • Rolling Meadows, IL 60008 • Tel 847-934-4141 • Fax 847-934-4175
• Email: info@telluriantech.com • www.telluriantech.com